





EE EE-F9M/F10M

OVERALL DIMENSION

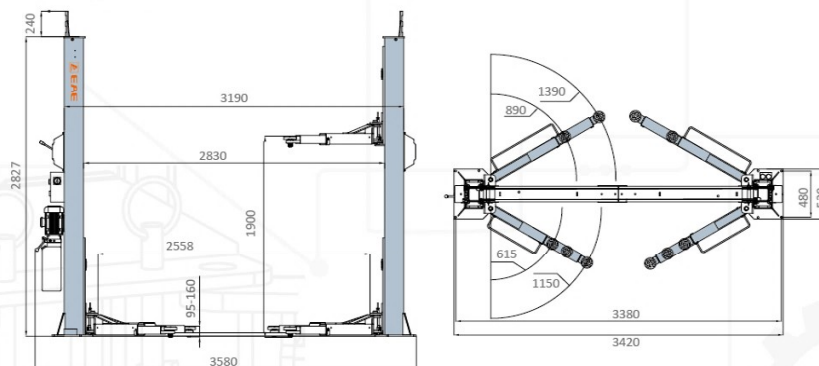

EE-F9M

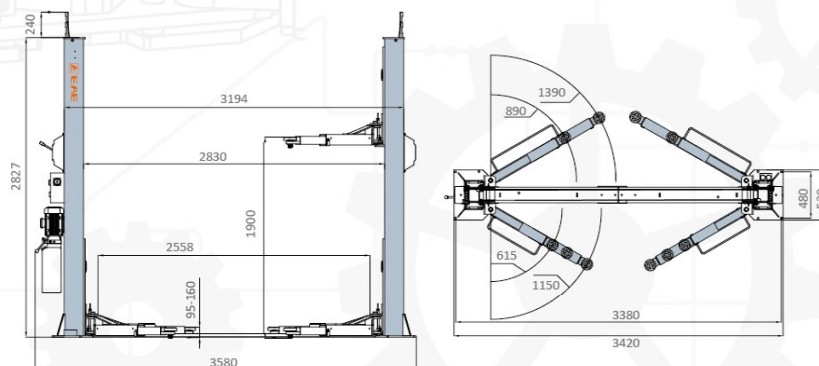

EE-F10M



F SERIES

TWO POST LIFT

- Single side release for mechanical safety locking unit.
- Durable cylinders in each column carry with anti-surge valves.
- Standard door protection pads to prevent possible damage to the door opened without caution.
- Pre-fixed hydraulic pressure prevents overloading operation.
- Standard column curtain.
- 24V safe control system.



Single Side Release



Door Protection Pads



24 Control Box



Round Screw-up Lifting Pad



Strong Carriage and Arm Structure

TECHNICAL DATA

MODEL NO.	EE-F9M	EE-F10M
Lifting capacity	3500kg	4200kg
Max. lifting height	1900mm	1900mm
Min. height(C)	95mm-160mm	95mm-160mm
Lifting time	55S	55S
Capacity of motor	2.2kW	2.2kW
Overall Height	2827mm+240mm	2827mm+240mm
Drive through	2558mm	2558mm
Two stage rear long arm(A)	890-1390mm	890-1390mm
Two stage front shortarm(B)	615-1150mm	615-1150mm
Electricity supply	According To Customer Needs	

* Max. Lifting height is measured with adjustable screw pads in highest position.

* Machine shown with optional equipment. Actual product appearance may differ.