



EE-6255E



EE-6215E



Arm Lock System



Strong Carriage and Arm Structure



Chain



5T 100mm
Casting Height Adapter




Round Screw-up Lifting Pad
and Triple Telescope Straight Arm

EE-6255E/6215E



BASE PLATE LIFT/CLEAR FLOOR LIFT

- 5000KG(11000LBS.) lifting capacity.
- 1900mm(74 3/4") lifting height with standard truck adapter.
- Electrical release, just press Up and Down button to operate the lift.
- Only 40 seconds raising time with optional quick motor to shorten your service time.
- The four triple stage arms combination make the lift can accommodate wide range of.
- Vehicles from Smart to Sprinter, light van.
- Baseless design for easy movement of maintenance equipment under the raised vehicle.
- Durable cylinders in each column carry with anti-surge valves.
- Screw-up lifting pads with clearance height less than 100mm(3 9/10").
- The arm locks engage automatically when the lift is raised and disengage when lowered fully.
- With vehicle roof protection. The power system switches off when vehicle roof touches the rubber protected overhead bar.
- Aluminum motor avoids overheating and ensures long service life.
- Standard door protection pads to prevent possible damage when open the door without caution.


OVERALL DIMENSION

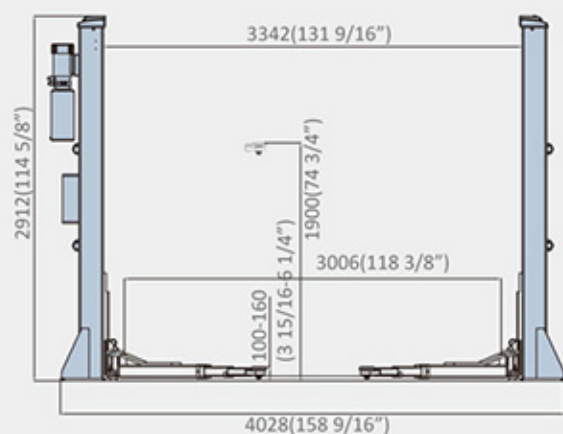

EE-6255E

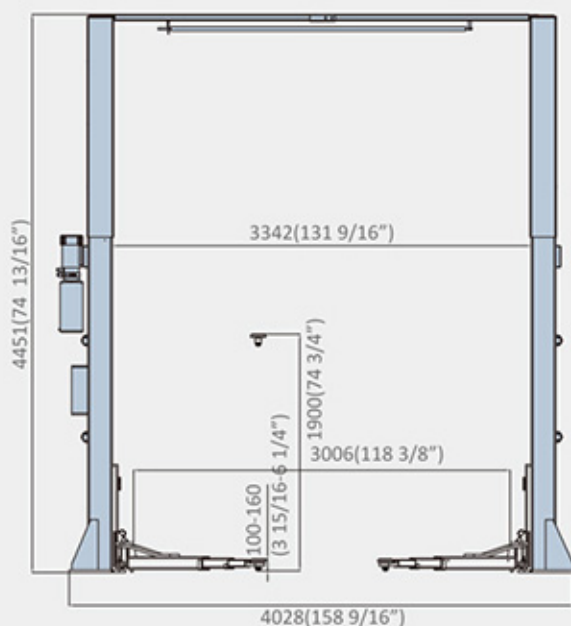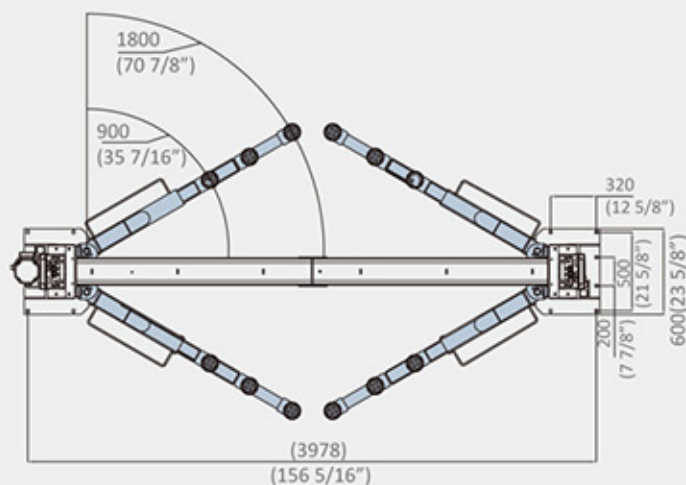

EE-6215E

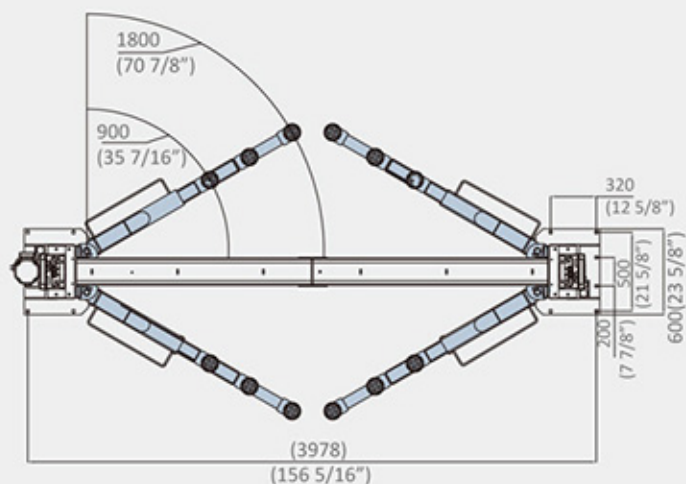

TECHNICAL DATA

MODEL NO	EE-6255E	EE-6215E
Lifting capacity	5000Kg(11000LBS.)	
Max lifting height	1900mm(74 3/4")	
Drive through	3000mm(118 1/8")	
Lifting time	45S-60S	
Capacity of motor	2.2kW/3.5kW	
Rated oil pressure	22Mpa	18Mpa
Weight	924Kg(2000LBS.)	1060Kg(2300LBS.)
Electricity supply	According To Customer Needs	

* Machine shown with optional equipment. Actual product appearance may differ.

