

6.5T
Max. Capacity

6028MM
Max. Platform Length

User friendly
Electrical Lock Release (E version)




6435B
(with an optional rolling jack)



Motor Housing



Oil Hose Protection



Optional Rolling Jacks



Solid and Robust Cable Pulleys




6435S/B

FOUR POST LIFT

- Reliable mechanical safety locking system.
- Avoid rapid descending caused by leakages of hydraulic system by applying FLOW-CONTROL technique.
- The max. height switch limits the travel of runways and ensures cylinders work within the stroke.
- Protect against pinching and shearing using alarming buzzer in descending process.
- 24V safety control voltage.
- Reliable electrical release for easy and efficient use. (E version)
- Adjustable PD positions can accommodate different types of vehicle.
- Compact quick plug for electrical connection releases installers from too many wires and terminals and make initial installation much more efficient. Save more than 70% time on wire connection.
- Low profile runway is convenient for driving on and off and less demanding on space.
- The width between the platform can be adjust to 1150, 1025, 970, 915mm when installing.

OVERALL DIMENSION

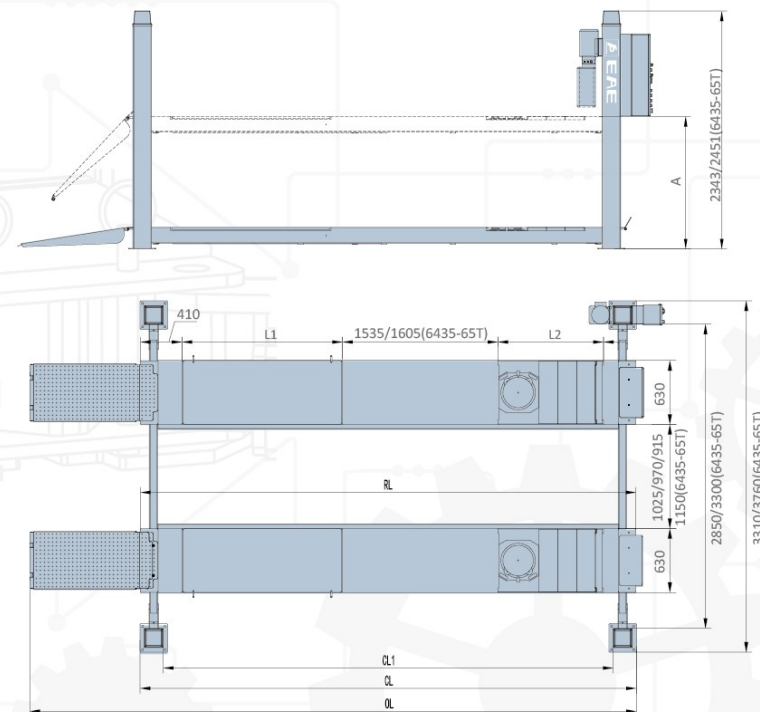

- S Flat platforms
- B Platforms with front recesses and rear slip plates
- BPD Platforms with front recesses , play detector, and rear slip plates.

TECHNICAL DATA

Model No.	Lifting capacity	Max. lifting height(A)	L1	L2	RL	CL1	CL	OL
6435S-48L	4.0T/5.0T	180-1830	N/A	N/A	4880	4438	4888	5948
6435S-52L					5280	4838	5288	6348
6435S-57L					5780	5338	5788	6848
6435B-48L	4.0T/5.0T	180-1830	1580	970	4880	4438	4888	5948
6435B-52L			1980		5280	4838	5288	6348
6435B-57L			2280		5780	5338	5788	6848
6435BPD-48L	4.0T/5.0T	180-1830	1580	970	4880	4438	4888	5948
6435BPD-52L			1980		5280	4838	5288	6348
6435BPD-57L			2280		5780	5338	5788	6848
6435S-65T	6.5T	225-1850	2280	1370	6000	5540	6028	7300
6435B-65T		265-1900						