HDM SERIES | HEAVY DUTY MOBILE COLUMN EAE

8.0T/10T Per Column | Wired and Wireless Signal Processing | HMI Screen | CE

QUIKMULTI



HDM88 64T

AC Power Supply Available.



HMI Screen
(Optional weight indicator)



Control is only permitted at a authorized column



Wireless communication



Accurate control for synchronization



Adjustable wheel supports accommodate tire diameters from 600mm to 1250mm



Support Stands (Optional)



Crossbeam support and Triangle height extension support (Optional)



Height extension support 200mm and Beam support (Optional)




HDM SERIES


HEAVY DUTY MOBILE COLUMN


- Each column has a maximum lifting capacity of 8.0T/10T.
- A maximum combination of 48 independent columns.
- Wireless and wired signal processing.
- Easier means for setting up the networks and selecting control modes.
- Battery powered, the lifting procedure starts without much work for setting up.
- HMI screen for setting networks, working modes and displaying crucial parameters.
- Tap the ID card to activate and access the control system.
- Audible warning for the final travel of lowering movement.
- The lifting system is battery powered. Each column has a charger rating AC110-240V-1Ph.
- DC24V safe control voltage.
- Adjustable wheel pick-up fork accommodates tire diameter from 500 to 1250mm.

OVERALL DIMENSION

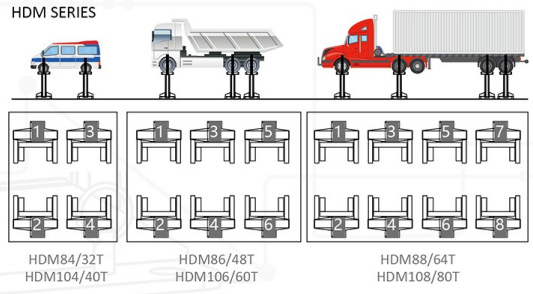

HDM84/32T HDM104/40T | HDM86/48T HDM106/60T | HDM88/64T HDM108/80T

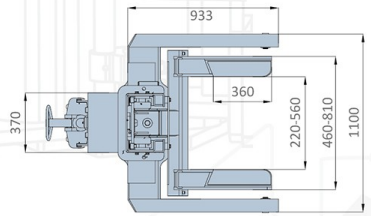

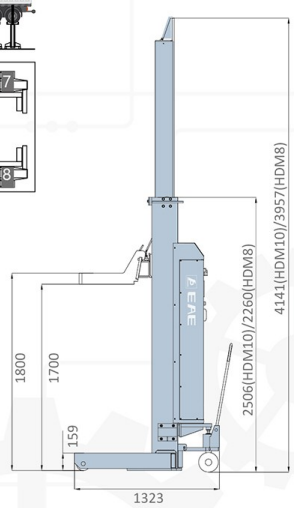

TECHNICAL DATA

MODEL NO.	HDM8	HDM10
Lifting capacity	8.0T	10T
Locking release	Electric	Electric
Max. lifting height	1800mm	1800mm
Min. height	159mm	159mm
Full-rise time under rated load	Approx. 85S	Approx. 85S
Motor power	2.2kW	2.2kW
Oil reservoir	14L	14L
Relief Pressure	14Mpa	17Mpa
Approximate Tire Size	500-1250mm	500-1250mm

* Machine shown with optional equipment. Actual product appearance may differ.





HEAVY DUTY LIFT